




KEY FEATURES

- Available with 30° (Narrow) or 100° (wide) symmetric optics
- Low profile
- Thermally managed for maximum longevity
- Lifespan up to 100 000 hours typical
- Available in assembled strings
- RGB model available
(See BFLED-RGB)

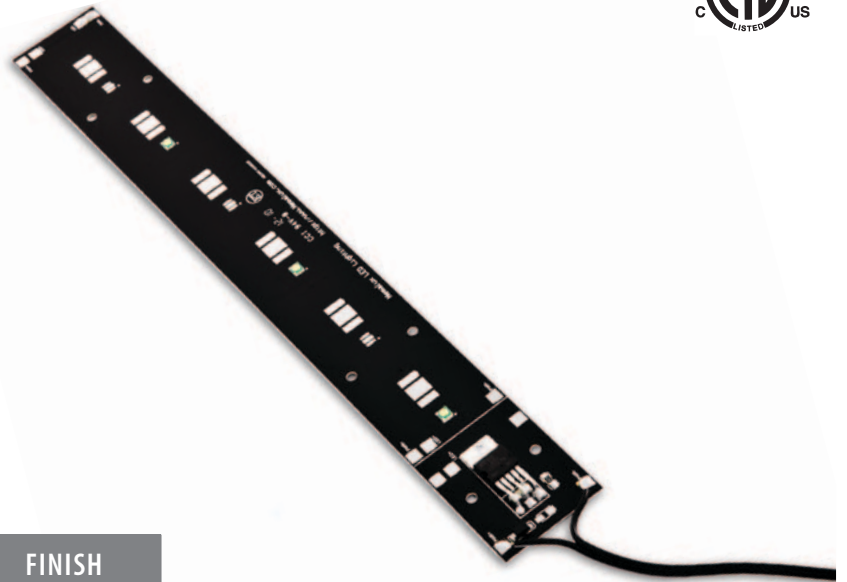


MODEL NUMBER SELECTOR Example: BFLED-NW-W-BLK

MODEL	COLOR	OPTIC	FINISH
BFLED			
	CW - Cool White NW - Neutral White WW - Warm White CUS - Custom <i>Contact for custom color</i>	N - Narrow W - Wide	BLK - Black WHT - White



TECHNICAL SPECIFICATIONS / MAXIMUM RATINGS

HOUSING	N/A - Bare PCB (Can be uniformly coated by request)
MOUNTING	#4 Mounting Screws or DBL Sided Tape
VOLTAGE MAXIMUM	16 VDC
TYPICAL INPUT VOLTAGE	12 VDC
POWER	3.85 W @ 12 VDC Per Foot
CURRENT	320 mA @ 12 VDC Per Foot
CONNECTIONS	3 Ft Flying Lead (Custom Lengths Available)
TEMPERATURE RANGE	-40°C – +85°C
TYPICAL CASE TEMPERATURE	~15°C Above Ambient Temperature
CERTIFICATIONS	Extra Low Voltage
INGRESS PROTECTION	N/A
COLOR TEMP RANGE	CW: 6500K NW: 4300K WW: 3500K
CRI VALUE	CW: 75 NW: 75 WW: 80
TOTAL LUMENS	321
TOTAL SCOTOPIC LUMEN	738
WEIGHT	0.06 lb/ft 0.028 kg/ft

DIMENSIONS

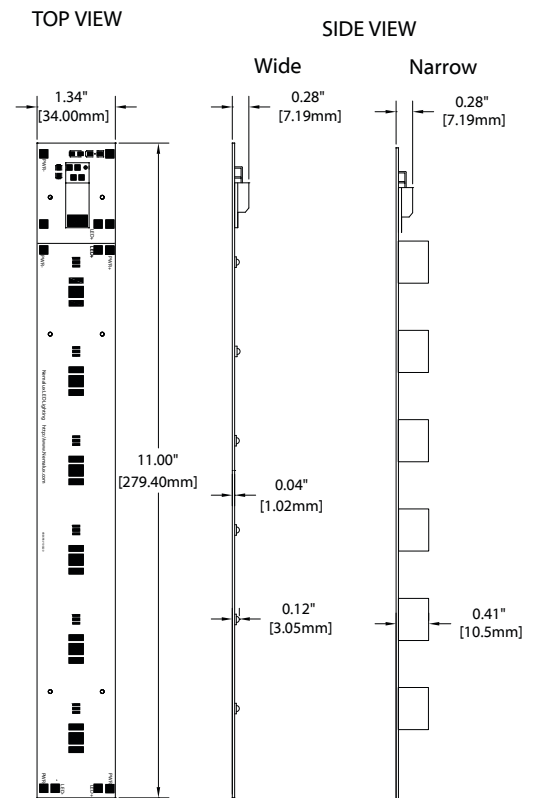

PHOTOMETRICS

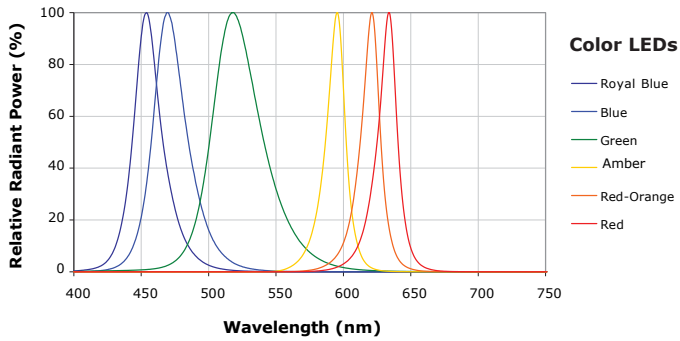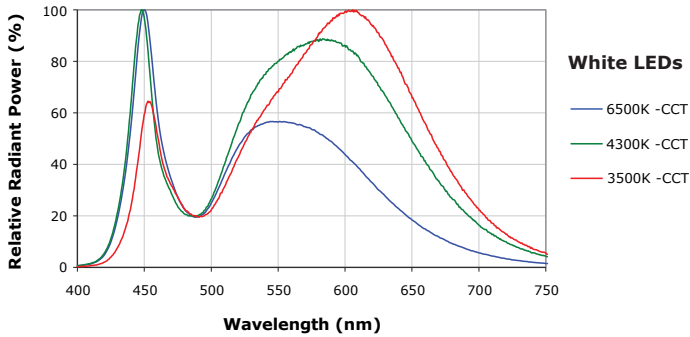


NARROW BEAM




(Shown in White Finish)

WIDE BEAM



MOUNTING OPTIONS

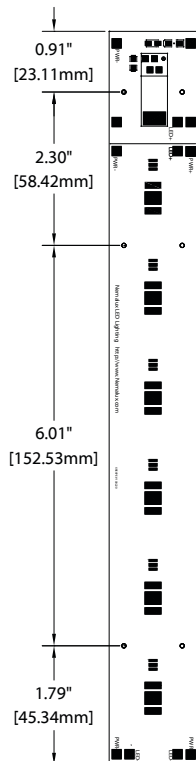

CUSTOM OPTIONS

WIRING SELECTIONS



Other wire lengths available in 1 foot increments.