




**KEY FEATURES**

- Robust construction suitable for outdoor applications
- DMX Programming available
- Thermally managed for maximum longevity
- Adjustable mounting bracket
- Operation and environmental benefits of LED technology
- Lifespan up to 100 000 hours typical

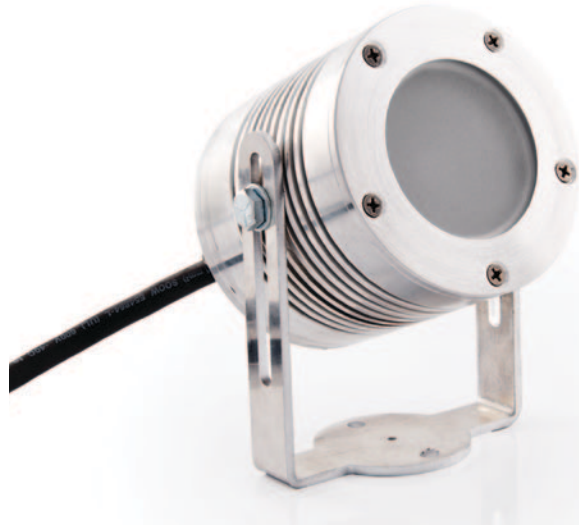


**MODEL NUMBER SELECTOR** Example: CANLED-RGB-W-ALU

MODEL	COLOR	OPTIC	FINISH
CANLED	RGB		
	RGB- Color Changing	W -Wide WF -Wide Frosted	ALU-Aluminium CUS -Custom <i>See pg2 for custom finishes</i>



**TECHNICAL SPECIFICATIONS / MAXIMUM RATINGS**

HOUSING	Aluminum
MOUNTING	Aluminum Yoke
VOLTAGE MAXIMUM	36 VDC
POWER	12 Watts Maximum
CURRENT	3 Channels @ 0.350 mA each
CONNECTIONS	6 ft Flying Multi conductor Lead
TEMPERATURE RANGE	-40°C – +85°C
TYPICAL CASE TEMPERATURE	~15°C Above Ambient Temperature
CERTIFICATIONS	Certified To CSA 22.2 No. 250.0 , Conforms To UL 1598 Standard
INGRESS PROTECTION	IP66
WAVELENGTH COLOR	CW: 6500K   WW: 3500K
LUMENS	420
WEIGHT	2.5 LB   1.13 KG


**DIMENSIONS**

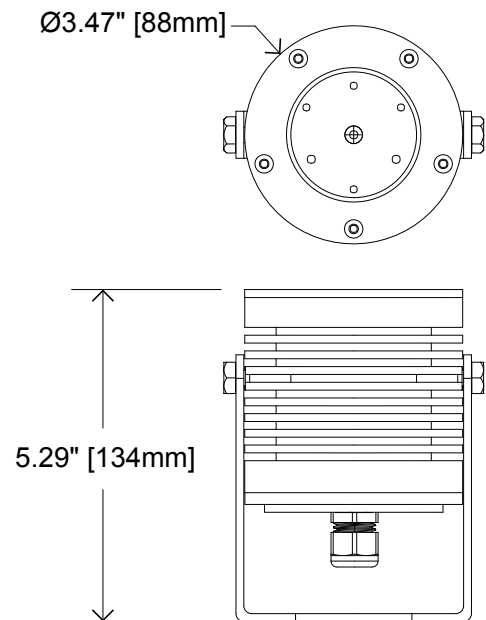

**PHOTOMETRICS**

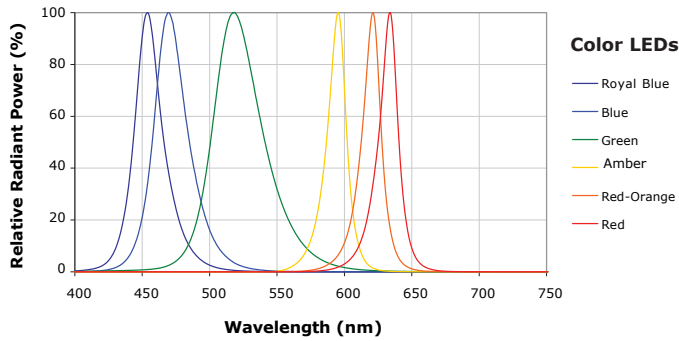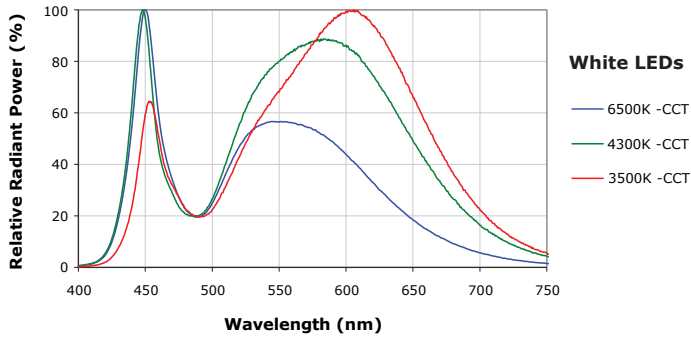

**WIDE BEAM**




**FROSTED LENS**



**MOUNTING OPTIONS**

**MOUNTING BRACKET**

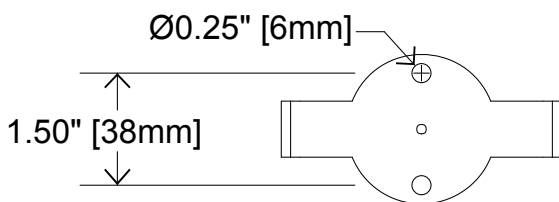

**CUSTOM OPTIONS**


**WIRING SELECTIONS**



Other wire lengths available in 1 foot increments.

**CUSTOM FINISHES**

**Anodized Aluminum**

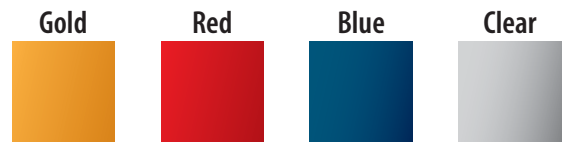

Please contact for further options

**Powder Coated Aluminum**



Please contact for further options