



KEY FEATURES

- Available with 30° (Narrow) or 100° (wide) symmetric optics
- Hazardous location available
- Thermally managed for maximum longevity
- Adjustable mounting bracket
- Lifespan up to 100 000 hours
- Available in multiple lengths and with Colored LEDs




MODEL NUMBER SELECTOR Example: GSLEDIP12-CW-N-BLK-GEN-12VDC

MODEL	COLOR	OPTIC	FINISH	LOCATION	POWER
GSLEDIP12				GEN	
	CW - Cool White NW - Neutral White WW - Warm White CUS - Custom <i>Contact for custom color</i>	N -Narrow W -Wide NF -Narrow Frosted WF -Wide Frosted	BLK - Black WHT - White CUS -Custom <i>Contact for custom finish</i>	GEN - General <i>C1D2 Available for Hazardous Locations See GSLEDIP-C1D2</i>	12VDC -12 Volts DC 24VDC -24 Volts DC

TECHNICAL SPECIFICATIONS / MAXIMUM RATINGS

HOUSING	Powder Coated Extruded Aluminum
MOUNTING	Mounting Brackets (Other Options Available See Pg2)
VOLTAGE MAXIMUM	28 VDC
TYPICAL INPUT VOLTAGE	12VDC: 11-16 VDC 24VDC: 22-28 VDC
POWER	8.4 W
CURRENT	0.66 A @12 VDC 0.33 A @ 24 VDC
CONNECTIONS	6Ft Flying Lead (Custom Lengths Available)
TEMPERATURE RANGE	-40°C – +85°C
TYPICAL CASE TEMPERATURE	~15°C Above Ambient Temperature
CERTIFICATIONS	Certified To CSA 22.2 No. 250.0 , Conforms To UL 1598 Standard
INGRESS PROTECTION	IP54
COLOR TEMP RANGE	CW: 6500K NW: 4300K WW: 3500K
CRI VALUE	CW: 75 NW: 75 WW: 80
TOTAL LUMENS	442
TOTAL SCOTOPIC LUMEN	946
WEIGHT	0.71b 0.3 kg


DIMENSIONS

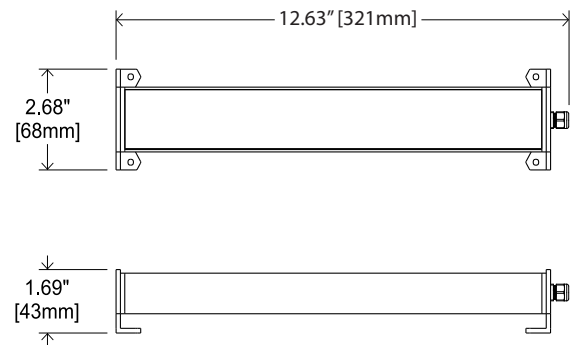

Alternate Lengths: (See respective Model Specification Sheets for details)

- GSLEDIP24 23.5" (597 mm)
- GSLEDIP36 34.5" (876 mm)
- GSLEDIP48 45.5" (1115 mm)

PHOTOMETRICS

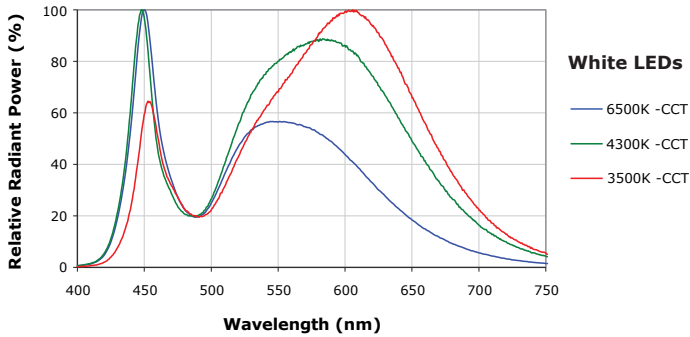


NARROW BEAM



FROSTED LENS



(Shown in White Option)

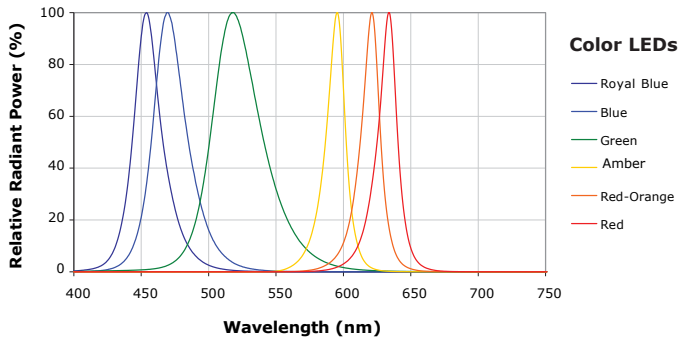

WIDE BEAM




MOUNTING OPTIONS


MOUNTING BRACKET




(Standard)



CLIP MOUNT



SURFACE MOUNT



CUSTOM OPTIONS


WIRING SELECTIONS



Other wire lengths available in 1 foot increments.

CUSTOM FINISHES

Anodized Aluminum

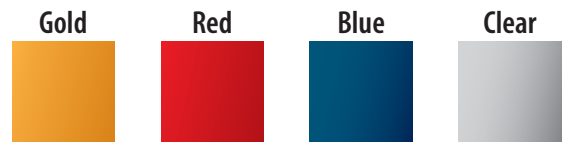

Please contact for further options

Powder Coated Aluminum



Please contact for further options